

Habiins

HB12 / HB85





Covered wagon Gedeckter Wagen

	A	B	C	D	
S	36,0 t	44,0 t	54,0 t	62,0 t	** HB 85
S	36,5 t	44,5 t	54,5 t	62,5 t	** HB 12
120	00,0 t				

Gauge Profil	G2
Overall length over buffers Wagenlänge über Puffer	23.240 mm
Loading length Ladelänge	21.984 mm
Loading width Ladebreite	2.770 mm
Loading area in m ² Ladefläche in m ²	61 m ²
Loading volume (cube) in m ³ Laderaum in m ³	180 m ³
Tare weight Eigengewicht	ca. 28.000 kg ^{HB 85} 27.500 kg ^{HB 12}

Maximum floor pressure allowed Zulässige Fußbodenbelastung	50 kN
Floor height above top of rail Fußbodenhöhe über Schienenoberkante	1.200 mm
Minimum curve radius Kleinster befahrbarer Gleisbogenhalbmesser	35 m
Number of sliding walls Anzahl Schiebewände / Wagenseite	2
Access height when sliding doors fully opened/retracted Schiebewandöffnung – Höhe	3.100 mm
Access width when sliding doors fully opened/retracted Schiebewandöffnung – Breite	10.817 mm
Number of Europallets (800 × 1200 mm) Anzahl EUR-Paletten (800 × 1200 mm)	54 units
Number of Industrial Pallets (1000 × 1200 mm) Anzahl IND-Paletten (1000 × 1200 mm)	42 units
Securing rings (lateral) Verzurrösen (seitlich)	32 units

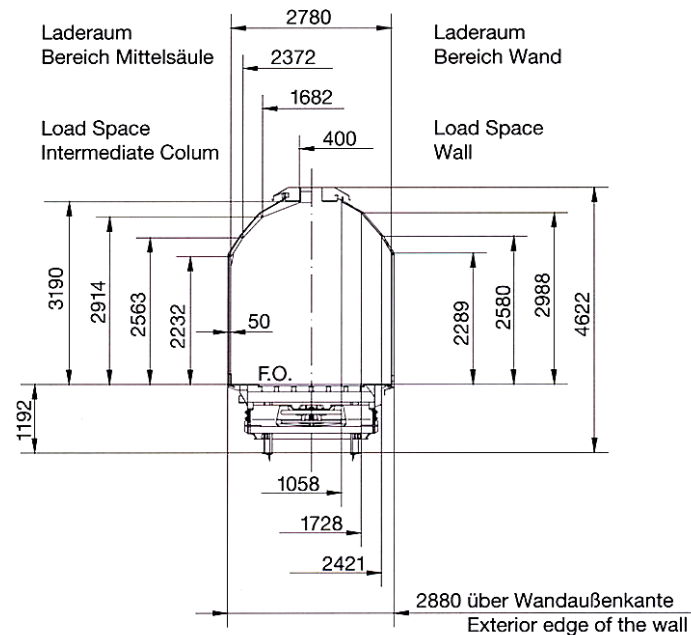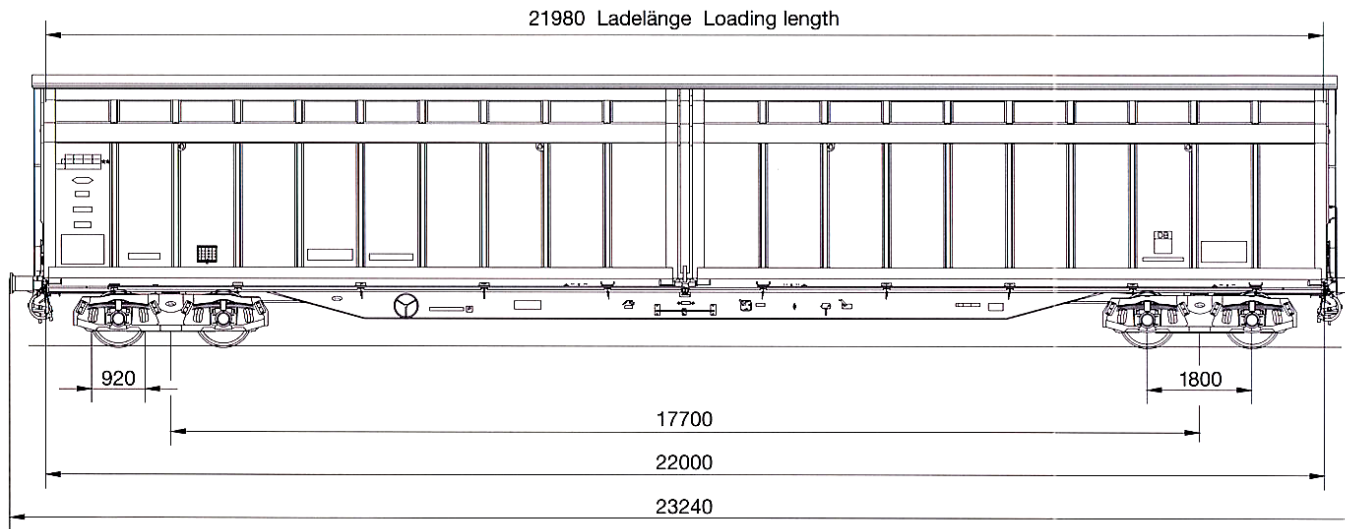

Height above floor Höhe über Fußboden	Loading width Vorhandene Ladebreite	
	wall area Wandbereich	portal area Portalbereich
0	2780	2780
2232	2780	2780
2289	2780	2710
2300	2766	2696
2350	2705	2635
2400	2643	2573
2450	2581	2511
2500	2520	2450
2550	2458	2388
2563	2442	2372
2580	2421	2339
2600	2387	2299
2650	2302	2201
2700	2217	2103
2750	2132	2004
2800	2047	1906
2850	1962	1808
2900	1877	1710
2914	1854	1682
2950	1793	1515
2988	1728	1338
3000	1688	1283
3050	1522	1050
3100	1357	818
3150	1191	586
3190	1058	400